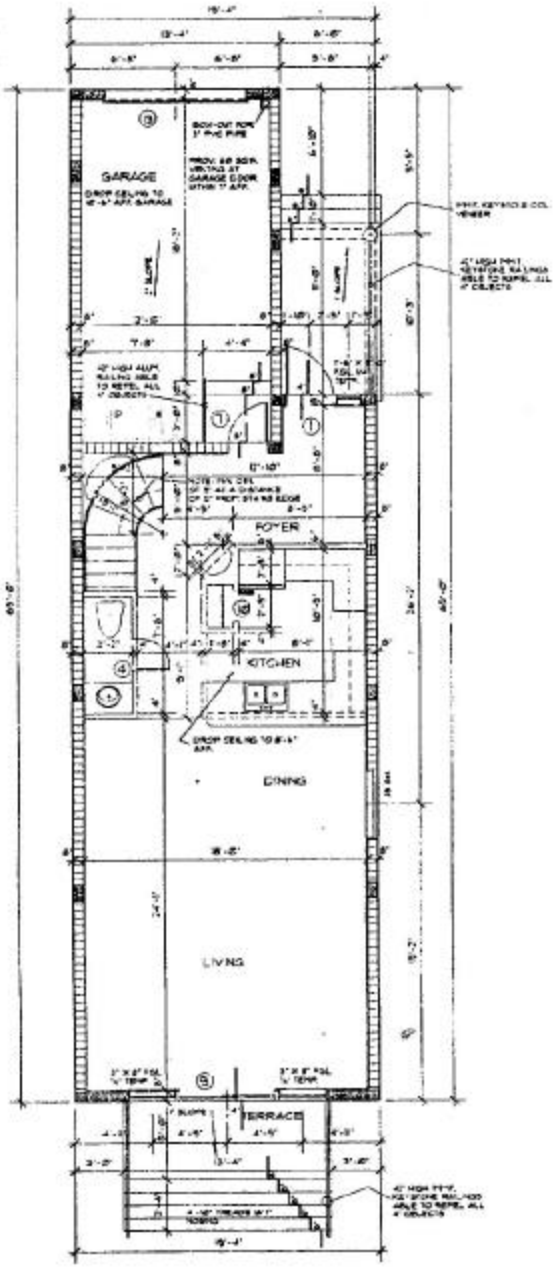


## GROUND FLOOR PLAN

SC. 1/4" = 1'-0"

NOTE: ALL EXTERIOR FIN. FL. SURFACES TO BE OF AN APPROVED NON-SLIP FINISH

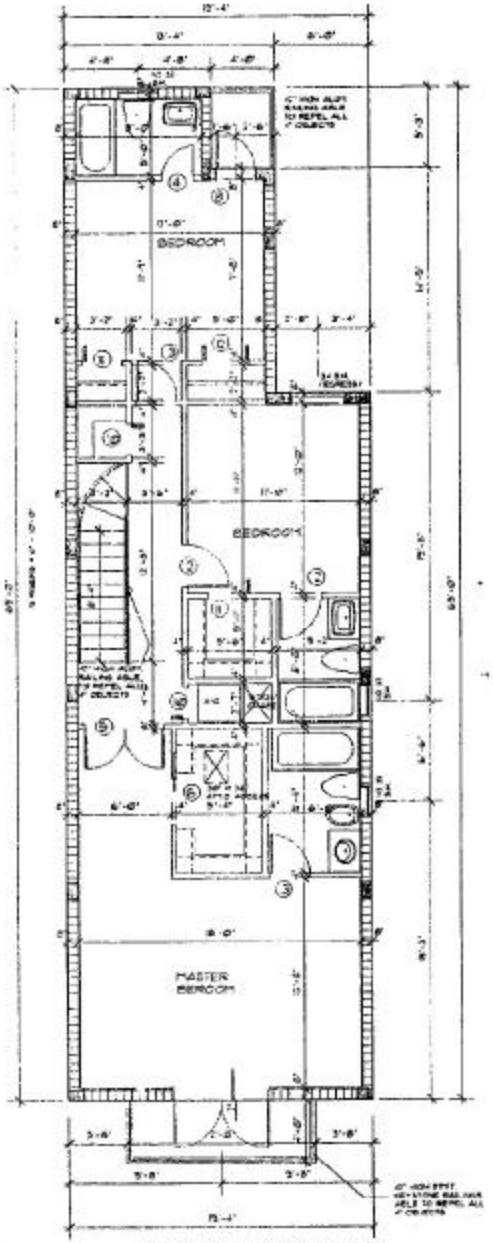


## SECOND FLOOR PLAN

SC. 1/4" = 1'-0"

NOTE: ALL EXTERIOR FIN. FL. SURFACES TO BE OF AN APPROVED NON-SLIP FINISH

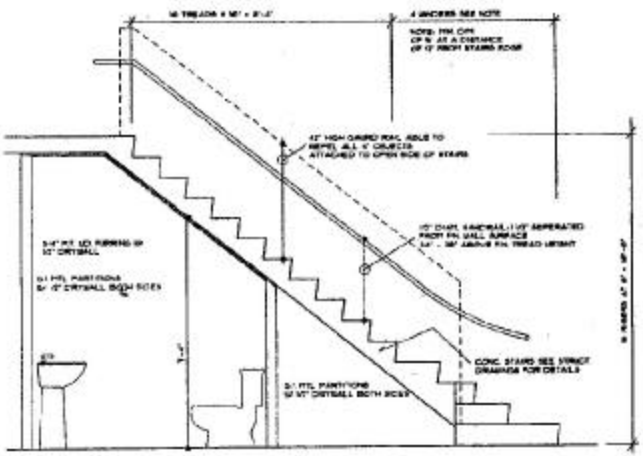

## STAIR SECTION

SC. 1/2" = 1'-0"

## DOOR SCHEDULE

| MARK | OPENING WIDTH | OPENING HEIGHT | SWING | MATERIAL | TYPE | FRAME | THRESHOLD | WEATHER STRIP | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 3'-0" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | YES | YES | SOLID CORE |
| 2 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | NO | NO | HOLLOW CORE |
| 3 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | NO | NO | HOLLOW CORE |
| 4 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | NO | NO | HOLLOW CORE |
| 5 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | NO | NO | HOLLOW CORE |
| 6 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | NO | NO | HOLLOW CORE |
| 7 | 2'-6" | 8'-0" | 1¾" | WOOD | POCKET | WOOD | NO | NO | HOLLOW CORE |
| 8 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | YES | NO | SOLID CORE |
| 9 | 2'-6" | 8'-0" | 1¾" | WOOD | FLUSH | WOOD | YES | YES | SOLID CORE |
| 10 | 8'-0" | 8'-0" | - | AL. + GL. | FRENCH | AL. | YES | YES | 1/2" TEMP. GL. |
| 11 | 8'-0" | 8'-0" | - | AL. + GL. | FRENCH | AL. | YES | YES | 1/2" TEMP. GL. |
| 12 | 2'-6" | 8'-0" | 1¾" | WOOD | BI-FOLD | WOOD | NO | NO | FULL LOUVERED |
| 13 | 2'-6" | 8'-0" | 1¾" | WOOD | BI-FOLD | WOOD | NO | NO | FULL LOUVERED |
| 14 | 2'-6" | 8'-0" | 1¾" | WOOD | BI-FOLD | WOOD | NO | NO | FULL LOUVERED |
| 15 | 3'-0" | 8'-0" | 1¾" | ALUM. | OVERHEAD | ALUM. | NO | YES | PANELED |

### SAFETY / EGRESS DOOR NOTES

1) NO DOOR IN THE PATH OF TRAVEL OF MEANS OF ESCAPE SHALL BE LESS THAN 32" WIDE, EXCEPT THAT BATHROOM DOORS MAY BE 24" WIDE UNLESS A LARGER DOOR OPENING IS REQUIRED TO SATISFY THE REQUIREMENTS

2) EVERY "CLOSE" DOOR LATCH SHALL BE SUCH THAT CHILDREN CAN OPEN THE DOOR FROM INSIDE THE CLOSET

3) EVERY BATHROOM DOOR LOCK SHALL BE DESIGNED TO PERMIT THE OPENING OF THE LOCKED DOOR FROM THE OUTSIDE IN AN EMERGENCY

4) DOOR MAY BE SWINGING OR SLIDING, AND ARE EXEMPT FROM THE REQUIREMENTS OF SECTION 21.2.4.3 AND 21.2.4.4 OF THE 1991 ED. OF NFPA 101

5) NO DOOR IN ANY MEANS OF ESCAPE SHALL BE LOCKED AGAINST EGRESS WHEN THE BUILDING IS OCCUPIED. ALL LOCKING DEVICES SUCH PIPES OR PADLOCKS OR HASP CAN NOT BE EASILY BREAKED SHALL BE PROHIBITED

6) ALL DOOR HARDWARE SHALL BE LEVER TYPE ADA APPROVED

FBC, SECTION 1816.1 TERMITE PROTECTION: PRIOR TO THE BUILDING FINAL INSPECTION, A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT:

"THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES. TREATMENT IS IN ACCORDANCE WITH RULES AND LAWS ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES"